PRODUCT SPECIFICATIONS

CDVR36 and CDVT36 Direct Vent

GLASS VIEWING AREA

29 1/16"W x 20 3/8"H (591 Square Inches)

TECHNICAL INFORMATION

Max. Btu Input: 20,000 BTU/HR
Ignition System: Standing Pilot or Electronic
Gas Type: Natural or LP
Flue Type: Simpson Dura-Vent, Selkirk Metalbestos, MetalFab
Termination: Rear Vent or Top Vent
Clearance to Flue for Interior: 3" Top 1" Bottom and Sides
Clearance to Flue for Outside Wall: 1"
Clearance to Fireplace: Zero Clearance
CSA Design Certified

FIELD INSTALLED ACCESSORIES

Louvers: Polished Brass, Pewter
Curved Trim: Brass, Pewter, Black
Medium Trim Kit: Brass, Pewter, Black
Variable Thermostat Controlled Forced Air Blower (135 cfm) - BLOT
Cottage Clay firebrick (FBCD(R/T)36CC)
Natural Gas Conversion Kit (CDV36CKN)
LP Gas Conversion Kit (CDV36CKP)
Mesh Glass Cover
Ambient Technologies™ Remote Controls and Thermostats
Wood Cabinet Surrounds
Designer Facings

Current BDV400 trim and facing accessories will fit this unit.

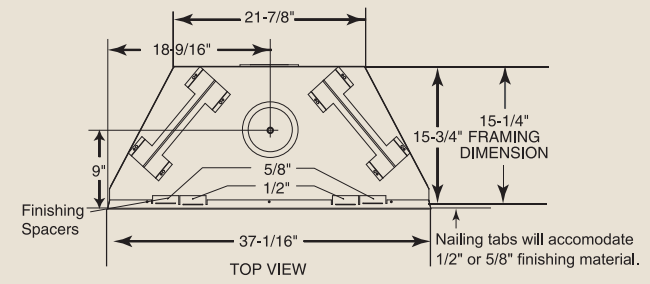

TOP VIEW

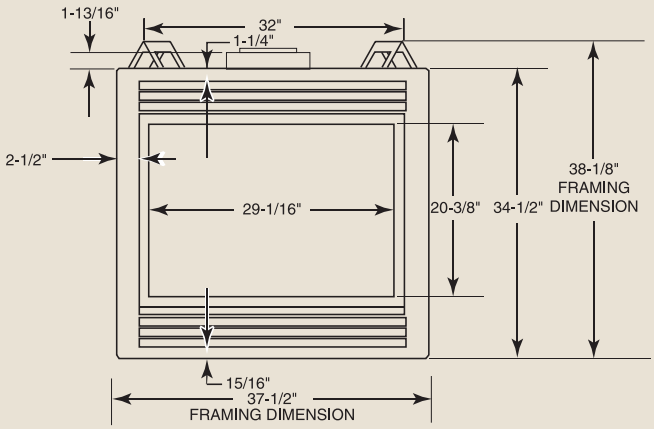

FRONT VIEW

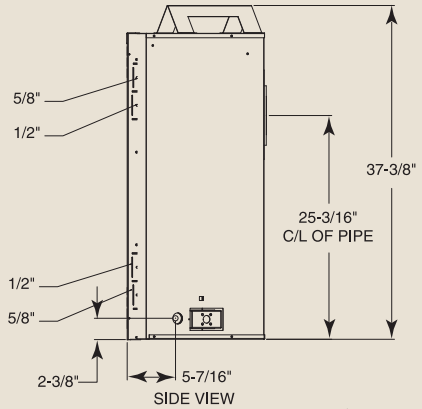

SIDE VIEW

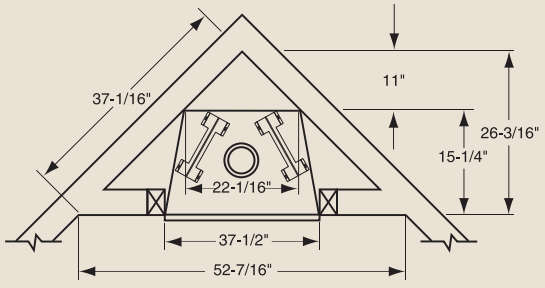

CORNER INSTALLATIONS

LIMITED LIFETIME WARRANTY

MADE IN U.S.A.

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361
www.monessenhearth.com

Monessen

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2007 Monessen Hearth Systems Co.